

DESCRIPTION

Badger Meter® produces the Model A1018 Opto-Isolator as well as an enhanced version, the Model A1018-4026.

The Model A1018-4026 isolator has superior three-way isolation and is offered as the standard.

The Model A-1018 Sensor Isolator can isolate sensitive Programmable Logic Controllers (PLC), and computer systems from sensor circuits that may have a different ground reference.

Model A-1018 isolates the signal generated by a flow sensor from system input circuitry. Some applications require signal voltage swings that exceed the nominal 8 vp-p signal produced by series 200 and 4000 flow sensors.

Both versions permit a flow-sensor signal to be shared with two input devices without concern about interaction between the devices (for example, a flow monitor and a PLC). In the A1018 version, *Power Supply Common* and *Signal Out (-)* share a single connection.

The A1018-4026 achieves signal-output isolation by using a small amount of the signal to power the output stage. From a signal standpoint, in most applications, the only difference between the two versions is that the *Signal Out (-)* wire is connected to Pin #1 in the A1018 and to Pin #4 in the A1018-4026. For most applications where the A1018 is acceptable, the versions can be made interchangeable by connecting Pin #1 to Pin #4.

The only cases where an A1018 *must* be used are the following:

- Sensor input is from a Low Frequency Square Wave device, such as our Series 4000, where the true square wave output could remain low for extended periods, eventually causing the output to toggle high due to loss of output control voltage.
- Any non-Badger Meter device that would be affected by 100 kΩ of parallel resistance.

MECHANICAL


The A-1018 installs into a standard Octal Relay Socket (Part Number 55105)




ELECTRICAL SPECIFICATIONS

Power Supply	12...28V DC at 65 mA	
Sensor Power Out Pin #5 (Ref to Pin #6)	14V DC at 15 mA max.	
Sensor Input	V Low	2.0V DC
Threshold Voltage	V High	6.0V DC
A-1018	Open Collector	30 mA max.
	Current Sink	
Signal Out (Pin#3)	Maximum Applied Open Circuit Voltage	28V DC
	Leakage Current (V High-State)	80 µA at 8V DC
A1018-4026	(100 kΩ Signal (+) to Signal (-) after initial 10 µF capacitor charge)	

DIMENSIONS

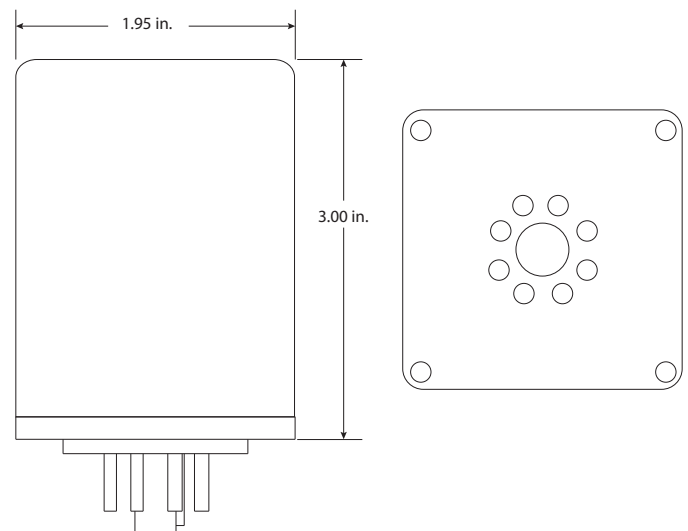


A-1018 PIN DIAGRAM

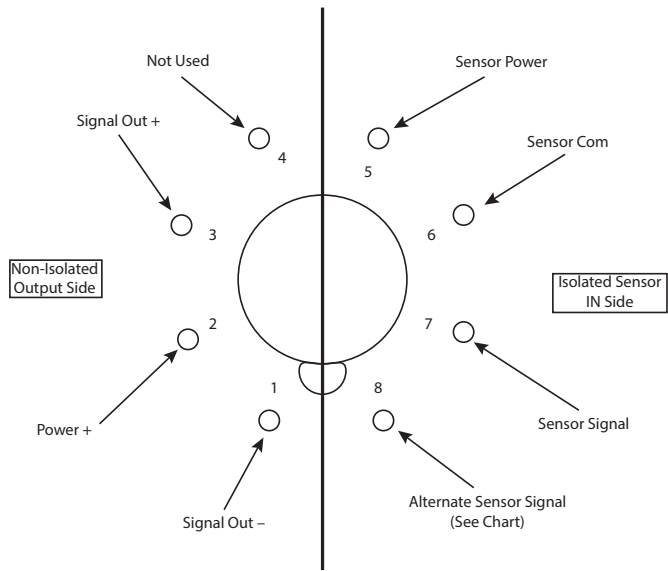

Pin	Description	A-1018 Connections	
1	Common	Power/Signal common and cable shield	
2	Power +	+ Power input / 12...24V DC	
3	Signal out +	Open collector transistor output (requires pull-up to logic level)	
4	Not used	—	
—	—	220 series	4000 series
5	Sensor power	Unused	Red
6	Sensor common	Black and drain	Black and drain
7	Sensor Signal	Red	White
8*	Not used	—	—


*The normally unused PIN#8 can be used instead of PIN#7 for the Sensor Signal, by adding a 1N4000 Series Diode with its Banded End (Cathode) connected to PIN#8. This provides added isolation, preventing the A-1018 from loading the Host System, if a problem occurs with the A-1018 or its Power Supply.

A-1018-4026 PIN DIAGRAM

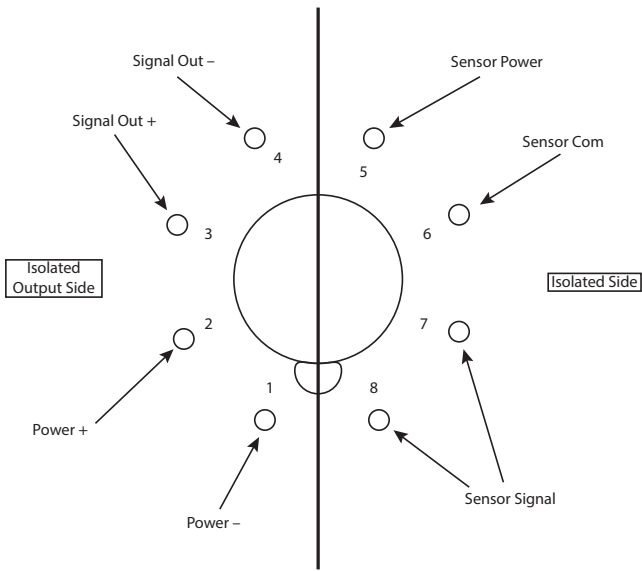

Pin	Description	A-1018-4026 Connections	
1	Power -	- Power input	
2	Power +	+ Power input / 12...24V DC	
3	Signal out +	Open collector transistor output (requires pull-up to logic level)	
4	Signal out -	—	
—	—	220 series	4000 series
5	Sensor power	Unused	Red
6	Sensor common	Black and drain	Black and drain
7	Sensor Signal	Red	White
8	Not used	—	—

WIRING DIAGRAM

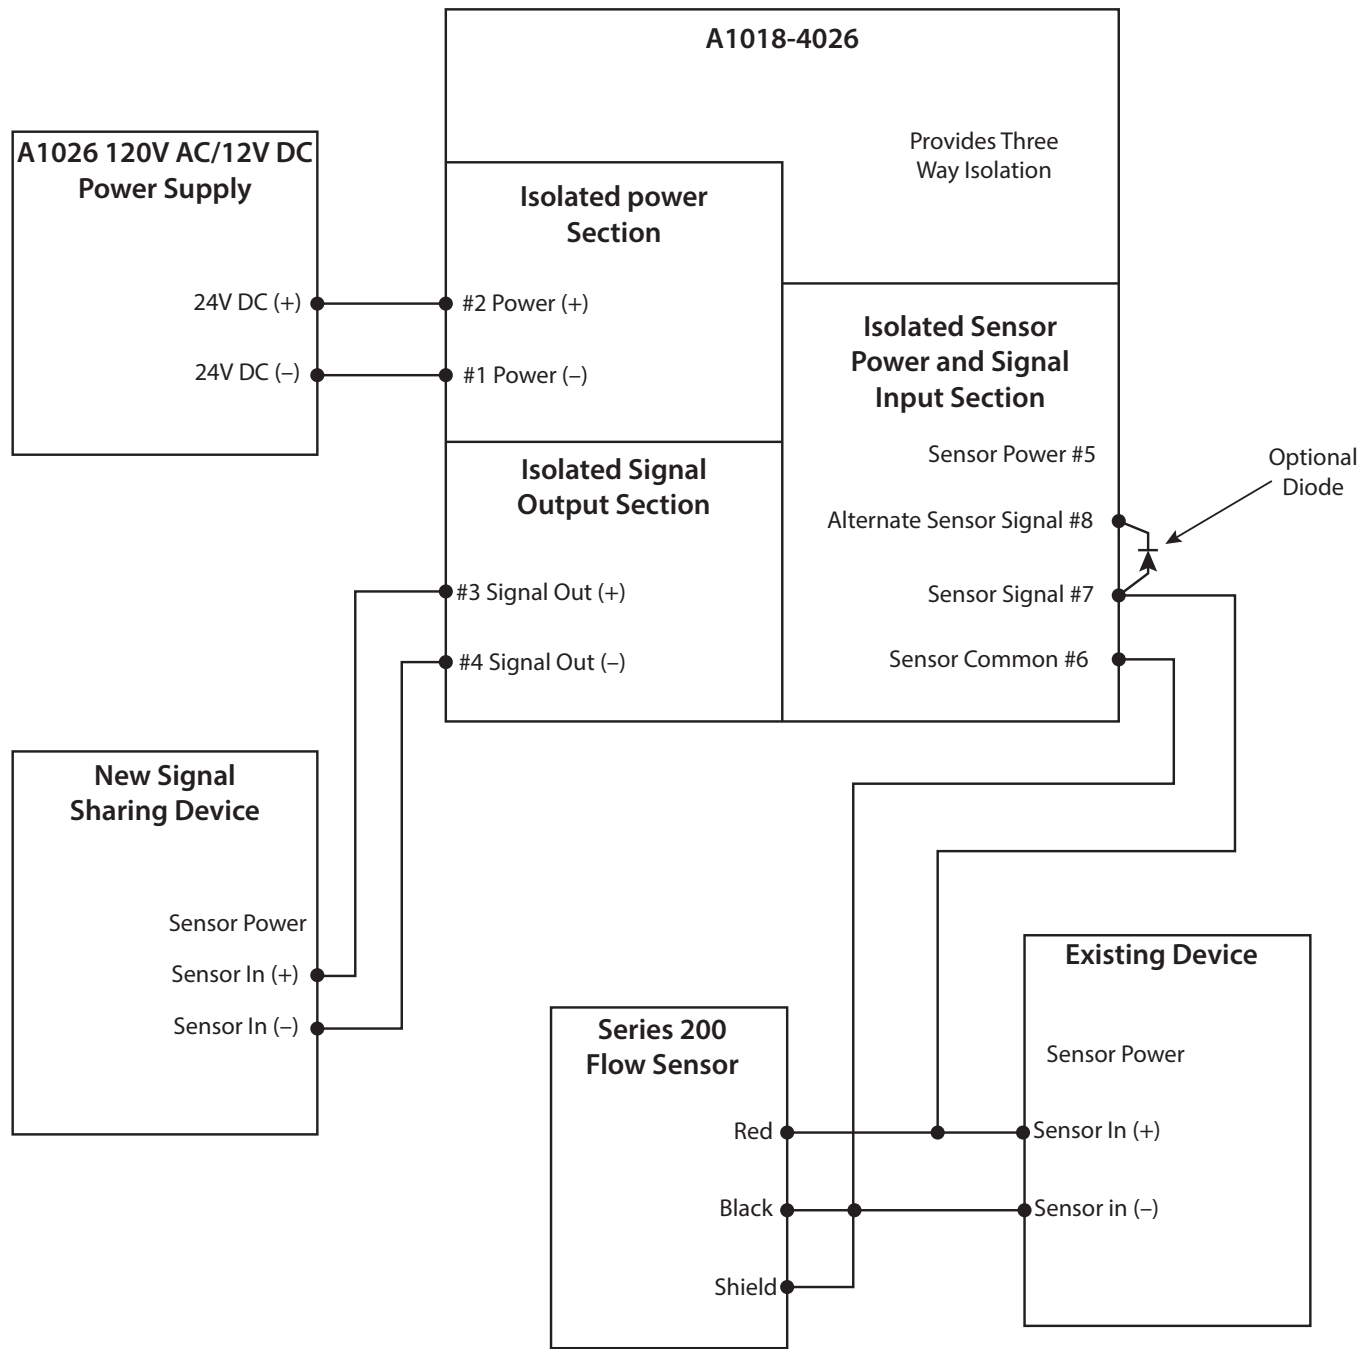

Control. Manage. Optimize.

Impeller and Data Industrial are registered trademarks of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2017 Badger Meter, Inc. All rights reserved.

www.badgermeter.com