
Model 888VFD FL MATIC


Sizes 2" Thru 6" / 50 mm & 150 mm

## **Flomatic Corporation** LEAD FREE NSF/ANSI 61

## IAPMOR&T

## **Materials**

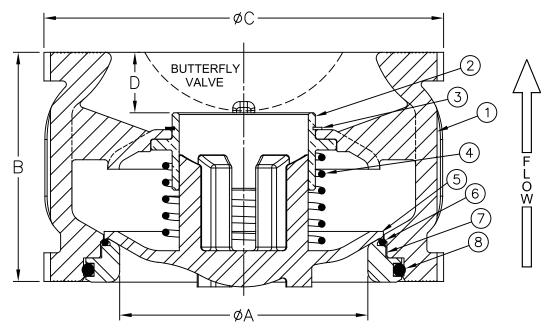



Max Temp 200°F (93°C) Max Inlet Pressure @ 150° F (65°C) 150# 300 psi (21bar) Max Inlet Pressure @ 150° F (65°C) 300# 500 psi (34bar)

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	A536 65-45-12
2	1	Bushing	Bronze	C95400 or 8780
3	1	Retaining Ring	Stainless Steel	302
4	1	Spring	Stainless Steel	302
5	1	Poppet	Stainless Steel	CF8M 316
6*	1	O-Ring*	EPDM	5778-70
7	1	Seat Ring	Stainless Steel	CF8M 316
8	1	O-Ring	EPDM	5778-70

\*RESILIENT SEATING IS STANDARD

## **Dimensions**

MSS SP-125 Compliant PATENT # 6,024,121

Size		D "	ØA		В		øс		D		Weight		# of Bolts		Bolt Size by Flange	
inch	mm	Part #	inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg	150#	300#	150#	300#
2	50	2434VFD	2-13/32	61	2-5/8	67	4-1/4	108	51/64	20	4	2	4	8	5/8 x 5 <b>-</b> 1/4	5/8 x 5-1/2
2-1/2	65	2432VFD	2-43/64	68	2-7/8	73	5	127	57/64	23	6	3	4	8	5/8 x 5-1/4	3/4 x 6-1/2
3	80	2435VFD	3-1/4	83	3-1/8	79	5-3/4	146	3/4	19	9	4	4	8	5/8 x 6-1/4	3/4 x 7
4	100	2436VFD	4-1/4	108	4	102	7	178	1-3/64	27	16	7	8	8	5/8 x 7	3/4 x 8
5	125	2433VFD	5-1/4	133	4-3/4	121	8-3/8	213	1-11/32	34	21	10	8	8	3/4 x 7-3/4	3/4 x 9
6	150	2437VFD	5-29/32	150	5-1/2	140	9-3/4	248	1-27/32	47	34	15	8	12	3/4 x 8-3/4	3/4 x 10

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2021 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

